

# Mitutoyo

Mitutoyo Quality

## High-Accuracy Digimatic Micrometer MDH-25MB

Small Tool Instruments  
and Data Management



d2

Mitutoyo

HIGH ACCURACY

World's First

0.1  $\mu\text{m}^*$

Resolution Micrometer

\*0.1  $\mu\text{m}$ =0.0001 mm

**d2**

"d2" is a generic name for Mitutoyo Digimatic output compatible with up to 8 digits of I/O data.

High Accuracy  
DIGIMATIC MICROMETER

0.0001mm

## MDH-25MB

### Easy, Rapid and High-accuracy Measurement of Workpieces That Require an Accuracy of 1 $\mu\text{m}$ or Less

Delivering  $\pm 0.5 \mu\text{m}$  accuracy at  $0.1 \mu\text{m}$  resolution means Mitutoyo's MDH-25MB is the most accurate hand-held micrometer available\*, and this instrument will enable you to easily and rapidly measure workpieces that require very-high-accuracy measurement. This remarkable performance is attained due to Mitutoyo's proprietary ABS (absolute) rotary encoder and high-accuracy thread cutting technology.

\*Mitutoyo's research as of March, 2018

#### Position and Merits of MDH-25MB



- Measuring accuracy equivalent to a laser micrometer
- No jig, etc. needed to be fabricated
- Simple measurement enabled even for very small parts
- Portable and compatible with standard workpiece measurement techniques, similar to conventional micrometers
- Economical - low investment in equipment compared with other choices

# APPLICATION

## Beyond the Usual Micrometer! Many More Kinds of High-accuracy Parts Now Measurable.


This micrometer allows easy, rapid and high-accuracy measurement of workpieces that require a measuring accuracy of 1  $\mu\text{m}$  or less, such as medical parts, precision instruments and auto-parts regarded as being difficult to accurately measure with conventional micrometers.



 Manufacturing

### Pin gage measurement


Pin gages are widely used for measurement of the diameter or center-to-center distance of holes. The periodic calibration of a high-precision pin gage requires high-accuracy measurement.

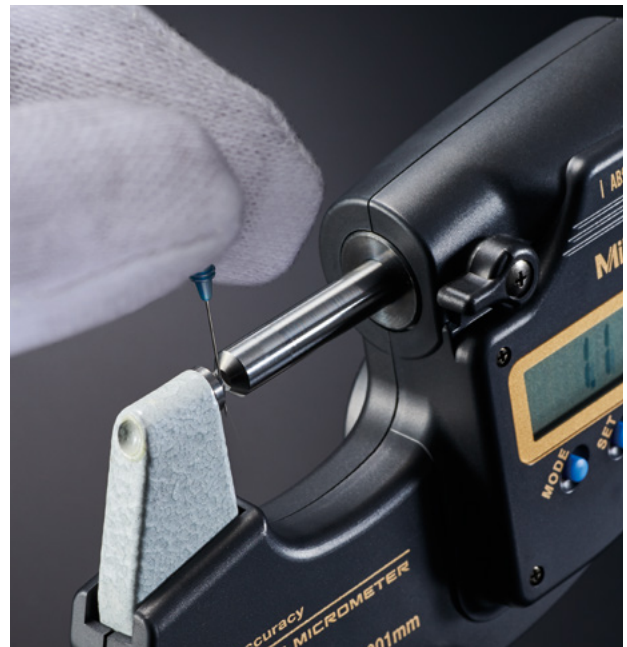

 Medical care

### Hypodermic needle measurement

To reduce injection pain as much as possible, the outside diameter of hypodermic needle tips has become much thinner. Some needles have a tip diameter of just 0.2 mm, thus requiring high-accuracy measurement.

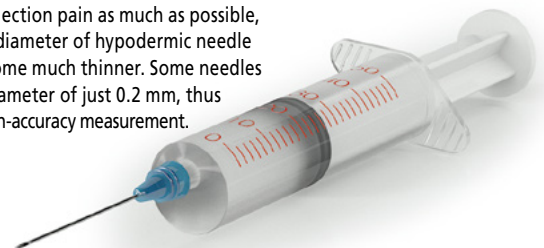




 Electric/electronic devices

### Fiber optics measurement

The optical-transmission cylindrical "core" made of quartz glass is 0.01 to 0.05 mm in diameter. Since its thickness is similar to a strand of hair, high accuracy is required for its measurement.




 Manufacturing

### Gap gage calibration

Gap gages are widely used for easy measurement of small gaps in assemblies. Periodic gage calibration is indispensable for accuracy control to detect undue wear.



 Automobile and machine tools

### Gear tooth measurement

As gears decrease in size and weight, the MDH allows for convenient high accuracy evaluation. MDH simply enables accuracy evaluation with it on hand for the customer demand of high accuracy.



 Medical care

### Implant measurement


An abutment is used for dental implants. Abutments have various lengths, angles, and materials. Each abutment needs to be made and measured very accurately.



 Medical care

### Catheter measurement

High-accuracy measurement is needed when manufacturing the fine tubing widely used in the medical field, such as a catheter that plays a crucial part in dilating a blood vessel.

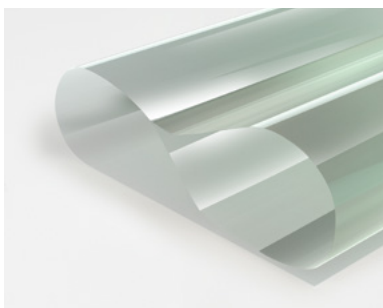

 Electric/electronic devices

### Optical film measurement

Optical films are widely used to display still images or moving images on a car navigation device or LCD TV. The micrometer accuracy is a must for measuring film thickness.



 Machine tools

### Cutting tool measurement

The diameter of extremely small drills used for manufacturing precision tools and instruments requires high accuracy measurement.



 Automobile/office equipment

### Bearing measurement

High-accuracy measurement is required for the component parts of anti-friction ball and roller bearings that are required to support vibration-free rotation in high-quality products.



# USABILITY



## Reliable operation

The sound of the ratchet provides a reliable operation and repeatable measurements.



## Wear-resistant carbide tip

The  $\phi 3.2$  mm carbide tip on the measuring face is highly resistant to wear, allowing accurate measurement for an extended period of time.



## Enhances productivity, ease of use

This micrometer is equipped with many versatile and time-saving functions such as resolution switching (0.0001 mm/0.0005 mm), function lock, and presetting.

## Absolute encoder

The ABS (absolute) rotary encoder eliminates the need for origin point setting at every power-on, allowing immediate starting of measurement. This encoder achieves high reliability without causing an overspeed error.

## Zero-setting function

This function allows the display to be zero set at any position, thus facilitating comparative measurement. Also the absolute value from the origin can be restored.

## Built-in "Hold" function

This function can hold (freeze) the displayed value. Enables the micrometer to be removed from a workpiece when the readout is not easily viewable so the measurement value can be read at your convenience.

**ABSOLUTE™**

## ■ Measurement Data Recording Tools (Optional)



DP-1VA LOGGER

**Mini-printer equipped with data logger function**  
**Digimatic mini processor DP-1VA LOGGER No. 264-505**  
 (See Catalog No. E12041)

The data logger function allows data output to a PC and automatic logging of measurement data in an Excel-format inspection certificate using Mitutoyo USB-ITPAK. It provides significant potential for efficiency improvement in the QC function.


## ■ Standard Accessories

- Heat shield (04AAB969A: 293-100-10  
04AAB969B: 293-130-10) x 1
- Lithium battery (CR2032: Battery supplied is for testing purpose only) x 1
- Spanner (200877) x 1
- Screwdriver (04AAB985) x 1
- Lens paper
- Inspection certificate

## ■ Optional Accessories

- Lens paper x 1,000 (04AZB581)


### • Wired Connection to PC via USB Input Tool Series (Refer to Catalog E12007)

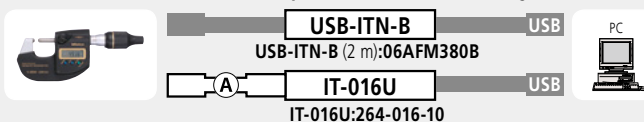


Connecting cables specific to output-function equipped models

- Ⓐ 1 m: 05CZA662
- 2 m: 05CZA663

### • Wireless Connection to PC via U-WAVE (Refer to Catalog E12000)

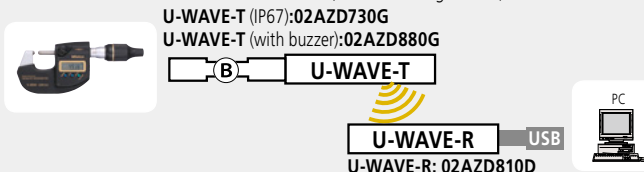

- Ⓑ For standard use (160 mm): 02AZD790B
- For foot switch use: 02AZE140B

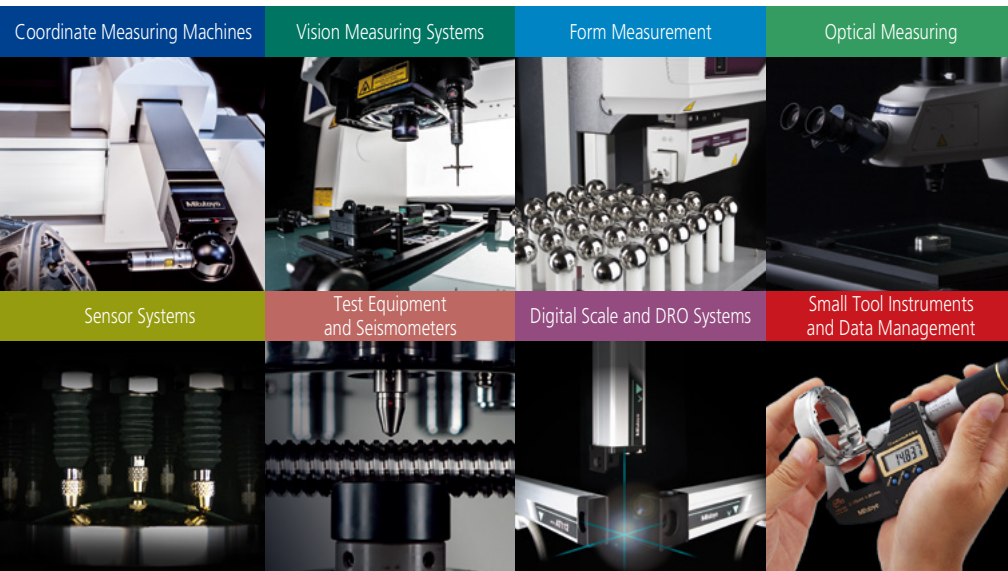

## Whatever your challenges are, Mitutoyo supports you from start to finish.

Mitutoyo is not only a manufacturer of top-quality measuring products but one that also offers qualified support for the lifetime of the equipment, backed by comprehensive services that ensure your staff can make the very best use of the investment.

Apart from the basics of calibration and repair, Mitutoyo offers product and metrology training, as well as IT support for the sophisticated software used in modern measuring technology. We can also design, build, test and deliver measuring solutions and even, if deemed cost-effective, take your critical measurement challenges in-house on a sub-contract basis.



Find additional product literature  
and our product catalog

[www.mitutoyo.com](http://www.mitutoyo.com)

**Note:** All information regarding our products, and in particular the illustrations, drawings, dimensional and performance data contained in this printed matter as well as other technical data are to be regarded as approximate average values. We therefore reserve the right to make changes to the corresponding designs. The stated standards, similar technical regulations, descriptions and illustrations of the products were valid at the time of printing. In addition, the latest applicable version of our General Trading Conditions will apply. Only quotations submitted by ourselves may be regarded as definitive. Specifications are subject to change without notice.

Mitutoyo products are subject to US Export Administration Regulations (EAR). Re-export or relocation of our products may require prior approval by an appropriate governing authority.

#### Trademarks and Registrations

Designations used by companies to distinguish their products are often claimed as trademarks. In all instances where Mitutoyo America Corporation is aware of a claim, the product names appear in initial capital or all capital letters. The appropriate companies should be contacted for more complete trademark and registration information.

# Mitutoyo

#### Mitutoyo America Corporation

[www.mitutoyo.com](http://www.mitutoyo.com)

One Number to Serve You Better

1-888-MITUTOYO (1-888-648-8869)

#### M<sup>3</sup> Solution Centers:

Aurora, Illinois (Headquarters)

Boston, Massachusetts

Charlotte, North Carolina

Cincinnati, Ohio

Detroit, Michigan

Los Angeles, California

Birmingham, Alabama

Seattle, Washington

Houston, Texas